

SCOVILL

Great Designs Deserve Great Fasteners.



Connect with Strength.

M I L I T A R Y A N D T A C T I C A L

MADE IN THE USA



A M E R I C A S

A S I A - P A C I F I C

E U R O P E

CROSS REFERENCE

NASM PART NO.	DOT PART NO.	DOT PART NO.
MS27977	Style 1	Lift-the-DOT™
MS27977	-1	90-XX-16205—2E
	-1B	90-XX-16205—2B
	-1N	90-XX-16205—2A
MS27977	-2	90-XX-16206—2E
	-2B	90-XX-16206—2B
	-2N	90-XX-16206—2A
MS27977	-3	90-BS-16506—2D
	-3B	90-BS-16506—2C
	-3N	90-BS-16506—2A
MS27977	-8	90-XB-16358—2E
	-8B	90-XB-16358—2B
	-8N	90-XB-16358—2A
MS27977	-10	90-BS-16509—2D
	-10B	90-BS-16509—2C
	-10N	90-BS-16509—2A
MS27977	-29B	90-XX-163624-2C
	-29N	90-XX-163624-2A
MS27977	-30B	90-XX-163627-2C
	-30N	90-XX-163627-2A
MS27977	-37B	90-XX-163634-2C
	-37N	90-XX-163634-2A
MS27977	-38B	90-XX-163637-2C
	-38N	90-XX-163637-2A
MS27977	-43B	90-XX-163664-2C
MS27977	-45B	90-XX-163674-2C
MS27977	-59N	90-XX-163604-2A
MS27977	-63B	90-BS-16349—2B
	-63N	90-BS-16349—2A
MS27977	-65	90-BS-16501—2D
	-65B	90-BS-16501—2C
	-65N	90-BS-16501—2A
NASM27980	Style 2	Durable™
NASM27980	-1	93-X2-10128—3E
	-1B	93-X2-10128—3B
	-1N	93-X2-10128—3A
NASM27980	-2	93-X2-10127—3E*
	-2B	93-X2-10127—3B
	-2N	93-X2-10127—3A
NASM27980	-6	93-XX-10224—3D
	-6B	93-XX-10224—3C
	-6N	93-XX-10224—3A
NASM27980	-7	93-BS-10370—3D
	-7B	93-BS-10370—3C
	-7N	93-BS-10370—3A
NASM27980	-8	93-BS-10412—3D
	-8B	93-BS-10412—3C
	-8N	93-BS-10412—3A

NASM PART NO.	DOT PART NO.	DOT PART NO.
NASM27980	Style 2	Durable™ - cont.
NASM27980	-9	93-BS-10413—3D
	-9B	93-BS-10413—3C
	-9N	93-BS-10413—3A
NASM27980	-10	93-BS-10414—3D*
	-10B	93-BS-10414—3C
	-10N	93-BS-10414—3A
NASM27980	-11B	93-XX-107042-2C
	-11N	93-XX-107042-2A
NASM27980	-12N	93-XX-107043-2A
NASM27980	-13B	93-XX-107044-2C
	-13N	93-XX-107044-2A
NASM27980	-14B	93-XX-107047-2C
	-14N	93-XX-107047-2A
NASM27980	-18B	93-XX-107087-2C
	-18N	93-XX-107087-2A
NASM27980	-27	93-XB-10342—3D*
	-27B	93-XB-10342—3C
	-27N	93-XB-10342—3A
NASM27981	Style 2A	Baby Durable™
NASM27981	-1	94-X2-12108—3E*
	-1B	94-X2-12108—3B
	-1N	94-X2-12108—3A
NASM27981	-2	94-X2-12126—3E*
	-2B	94-X2-12126—3B
	-2N	94-X2-12126—3A
NASM27981	-3	94-XX-12206—3D*
	-3B	94-XX-12206—3C
	-3N	94-XX-12206—3A
NASM27981	-4	94-BS-12303—3D*
	-4B	94-BS-12303—3C
	-4N	94-BS-12303—3A
NASM27981	-5	94-BS-12402—3D*
	-5B	94-BS-12402—3C
	-5N	94-BS-12402—3A
NASM27981	-6	94-BS-12404—3D
	-6B	94-BS-12404—3C
	-6N	94-BS-12404—3A
NASM27983	Style 4	Pull-the-DOT™
NASM27983	-1	92-XE-18100-A3B
	-1N	92-XE-18100-A3A
NASM27983	-2	92-XX-18201—3C
	-2N	92-XX-18201—3A
NASM27983	-3	92-BS-18303—3C
	-3N	92-BS-18303—3A
NASM27983	-4	93-BS-10412—3C
	-4N	93-BS-10412—3A

NASM PART NO.	DOT PART NO.	DOT PART NO.
NASM27984	Style 5	Segma™
NASM27984	-1	95-BS-21154—3F
	-1B	95-BS-21154—3B
	-1N	95-BS-21154—3A
NASM27984	-3	95-BS-22201—3D
	-3B	95-BS-22201—3C
	-3N	95-BS-22201—3A
NASM27984	-4	95-BS-22321—3D
	-4B	95-BS-22321—3C
	-4N	95-BS-22321—3A
NASM27984	-6	95-BS-22401—3D
	-6B	95-BS-22401—3C
	-6N	95-BS-22401—3A
NASM27984	-8	95-BS-22402—3D
	-8B	95-BS-22402—3C
	-8N	95-BS-22402—3A
NASM27986	Style 7	Speedy Rivets™
NASM27986	-1	95-BS-21409—3D
	-1B	95-BS-21409—3C
	-1N	95-BS-21409—3A
NASM27986	-2	95-BS-99884—3E
	-2B	95-BS-99884—3B
	-2N	95-BS-99884—3A
NASM27986	-3	95-BS-22405—3D
	-3B	95-BS-22405—3C
	-3N	95-BS-22405—3A
NASM27986	-4	95-BS-99972—3E
	-4B	95-BS-99972—3B
	-4N	95-BS-99972—3A
BNAX Army Ordnance (For Reference Only)		
549177		91-XB-78332—2G*
549219		91-XB-78333—2G*
549221		91-XB-78322—2G*
549220		91-XB-78323—2G*
549200		91-XB-783247-2A*
549201		91-XB-783257-2A*
583244		91-XX-783157-2G*
8359954		91-XB-78317—2G*
10921894		91-XB-78318—2G*
426687		91-BS-78403—2G*
426688		91-BS-78404—2G*
426686		91-BS-78505—2C*
7697418		91-BS-78502—2C*
549222		91-BS-78507—2C*

COLOR GUIDE†

Military Enamels



Tan 499
9053



Tan 500
9064



Coyote 498
9056



Foliage 504
9042



Camo Green 483
9071



DOT® Products Perform Under Pressure...

Scovill's DOT® products are renowned within the military for quality, durability, strength and performance. Our DOT products conform to stringent US Military and Commercial specifications (Mil-DTL-10884H), are Berry Amendment compliant (USC, Title 10, Section 2533a), can be identified by our registered CAGE Code and are proudly made in the USA. No matter the application, Scovill understands that every fastener or component must perform consistently under pressure.

Applications

- Uniforms
- Protective Gear
- Ammunition Packs
- Ground Cover
- Helmets
- Eyewear
- Holsters



Learn more about our full range of DOT® products.

**Contact your Scovill Sales Representative today to request a sample and quote.
Visit scovill.com or call 1-888-726-8455.**


MADE IN THE USA



Durable™ NASM27980, Style 2

These snap fasteners are ideal when superior snap action and holding strength are crucial. Durable™ fasteners feature a heavy-duty construction to ensure a firm grip that remains secure through years of use in even the toughest environments.

CAPS	SOCKETS	STUDS	POSTS
 <p>93-10112 D: .600/15.24mm H: .315/8.00mm X2</p>	 <p>93-10224 Normal Action XB</p>	 <p>NASM27980-7B 93-10370 Standard BS</p>	 <p>NASM27980-8B 93-10412 D: .565/14.35mm H: .240/6.09mm BS</p>
 <p>NASM27980-1B 93-10128 D: .600/15.24mm H: .185/4.69mm X2</p>	 <p>NASM27980-6B 93-10224 Hard Action XX</p>	 <p>93-10379 Deep Shelf BS</p>	 <p>NASM27980-9B 93-10413 D: .565/14.35mm H: .295/7.49mm BS</p>
 <p>NASM27980-2B 93-10127 D: .600/15.24mm H: .242/6.14mm X2</p>		 <p>NASM27980-27B 93-10342 Gypsy Stud XB</p>	 <p>NASM27980-10B 93-10414 D: .565/14.35mm H: .370/9.39mm BS</p>
 <p>93-10150 Mariner™ D: .605/15.36mm H: .201/5.10mm XV</p>		 <p>93-10704 XX, d</p>	
		 <p>93-10708 XX, e</p>	
		 <p>93-10362 XX, a</p>	




- BASE MATERIALS**
- BS All Brass
 - X2 All Brass
 - XB All Brass
 - XE All Brass
 - XV Brass/Plastic
 - XX Brass/Other
- SCREW TYPES**
- a #8-15 Self-Tapping
 - b #8-18 Self-Drilling
 - c #10-16 Self-Drilling
 - d #8-32 Machine
 - e #10-32 Machine
 - f #7 Wood Screw
 - g #8-18 Self-Tapping
 - h #8 Wood Screw
 - i #12-14 Self-Tapping
 - J #10-16 Self-Tapping



Baby Durable™ NASM27981, Style 2A

Baby Durable™ is an intermediate sized snap fastener that provides firm snap action and strong holding power without being visually prominent on heavy-duty products. The smaller size and strong snap action of this fastener allows for years of use in precise locations even in the most rugged environments.

CAPS	SOCKETS	STUDS	POSTS
 <p>94-12105 D: .454/11.53mm H: .128/3.25mm XB</p>	 <p>94-12205 Normal Action XB</p>	 <p>94-12302 Narrow Flange BS</p>	 <p>NASM27981-5B 94-12402 D: .490/12.44mm H: .179/4.54mm BS</p>
 <p>NASM27981-1B 94-12108 D: .525/13.33mm H: .125/3.17mm X2</p>	 <p>NASM27981-3B 94-12206 Hard Action XX</p>	 <p>NASM27981-4B 94-12303 Wide Flange BS</p>	 <p>NASM27981-6B 94-12404 D: .490/12.44mm H: .229/5.81mm BS</p>
 <p>NASM27981-2B 94-12126 D: .525/13.33mm H: .185/4.69mm X2</p>			 <p>94-12405 D: .424/10.76mm H: .229/5.81mm BS</p>
			 <p>94-12407 D: .424/10.76mm H: .179/4.54mm BS</p>




BASE MATERIALS
 BS All Brass
 X2 All Brass
 XB All Brass
 XE All Brass
 XV Brass/Plastic
 XX Brass/Other



Pull-the-DOT[®] NASM27983, Style 4







This heavy-duty, one-way fastener withstands extreme pressure from three sides without unlocking and is constructed of rust-resistant brass. Pull-the-DOT[®] has a well-earned reputation for performing in harsh environments and can be attached with semi-automatic machines.


CAPS	SOCKETS	STUDS	POSTS
 <p>NASM27983-1 92-18100 D: .598/15.18mm H: .166/4.21mm XE</p>	 <p>92-18201 Normal Action XB</p>	 <p>NASM27983-3 92-18303 BS</p>	 <p>NASM27983-4 93-10412 D: .565/14.35mm H: .240/6.09mm BS</p>
 <p>92-18103 D: .598/15.18mm H: .226/5.74mm XE</p>	 <p>NASM27983-2 92-18201 Hard Action XX</p>		 <p>93-10413 D: .565/14.35mm H: .295/7.49mm BS</p>



Lift-the-DOT[®] MS27977, Style 1

Strong and heavy-duty, Lift-the-DOT[®] fasteners lock on three sides and are opened by lifting the fourth side. Rust-resistant, they are constructed of brass or other non-ferrous metals to ensure that this fastener can withstand the most difficult conditions.

SOCKETS	BACK PLATES	STUDS	WASHERS
 <p>MS27977-1B 90-16205 H: .205/5.20mm XX</p>	 <p>MS27977-3B 90-16506 BS</p>	 <p>MS27977-63B 90-16349 BS</p>	 <p>MS27977-65B 90-16501 BS</p>
 <p>MS27977-2B 90-16206 H: .261/6.62mm XX</p>		 <p>MS27977-8B 90-16358 XB</p>	 <p>MS27977-10B 90-16509 BS</p>



SCREW STUDS



90-16362
XX, d

BASE MATERIALS

- BS All Brass
- X2 All Brass
- XB All Brass
- XE All Brass
- XV Brass/Plastic
- XX Brass/Other

SCREW TYPES


- a #8-15 Self-Tapping
- b #8-18 Self-Drilling
- c #10-16 Self-Drilling
- d #8-32 Machine
- e #10-32 Machine
- f #7 Wood Screw
- g #8-18 Self-Tapping
- h #8 Wood Screw
- i #12-14 Self-Tapping
- J #10-16 Self-Tapping



Segma™ NASM27984, Style 5

This closure is ideally suited for light-duty applications and features a segmented socket that delivers consistent snap action and focused performance.


CAPS	SOCKETS	STUDS	POSTS
			
NASM27984-1B 95-21154 D: .389/10.10mm BS	NASM27984-3B 95-22201 D: .375/9.52mm H: .198/5.02mm BS	NASM27984-4B 95-22321 D: .335/8.50mm H: .139/3.53mm BS	NASM27984-6B 95-22401 D: .365/9.27mm H: .263/6.68mm BS
			
			NASM27984-8B 95-22402 D: .363/9.22mm H: .337/8.55mm BS

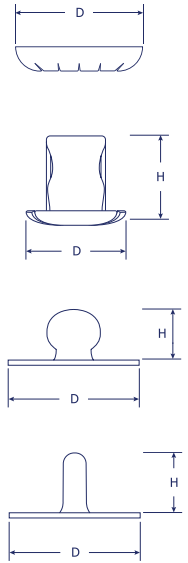

Speedy Rivets® NASM27986, Style 7

These rivets allow for a quick, reliable permanent closure on application material such as layers of leather, cloth and paper. Once attached, they create a tight, secure attachment that will resist rust.

CAPS	POSTS
	
NASM27986-2B 95-99884 D: .285/7.23mm BS	NASM27986-1B 95-21409 D: .325/8.25mm H: .288/7.31mm BS
	
NASM27986-4B 95-99972 D: .380/9.65mm BS	NASM27986-3B 95-22405 D: .395/10.03mm H: .314/7.97mm BS



BASE MATERIALS


- BS All Brass
- X2 All Brass
- XB All Brass
- XE All Brass
- XV Brass/Plastic
- XX Brass/Other




Common Sense[®]

These positive-locking fasteners never open accidentally. Each is assembled with a spring mechanism that holds the fastener under tension in the desired position until turned and released by hand. Dependable even in the most difficult environments, Common Sense[®] is available in a variety of turn button styles and may be used on hard and soft surface applications.

TURN BUTTONS		WASHERS	GROMMETS
			
91-78322 H: .680/17.27mm XB	91-78315 H: .790/20.06mm XX, i	91-78505 BS	91-78403 H: .335/8.50mm BS
			
91-78323 H: .790/20.06mm XB	91-78324 H: .810/20.57mm XB, f		91-78404 H: .395/10.03mm BS
			
	91-78325 H: .900/22.86mm XB, f		



TURN BUTTONS		BACK PLATES
		
91-78317 H: .805/20.44mm XB	91-78318 H: .870/22.09mm XB	91-78502 BS
		
91-78332 H: .724/18.38mm XB	91-78333 H: .838/21.28mm XB	91-78507 BS

BASE MATERIALS

- BS All Brass
- X2 All Brass
- XB All Brass
- XE All Brass
- XV Brass/Plastic
- XX Brass/Other

SCREW TYPES

- a #8-15 Self-Tapping
- b #8-18 Self-Drilling
- c #10-16 Self-Drilling
- d #8-32 Machine
- e #10-32 Machine
- f #7 Wood Screw
- g #8-18 Self-Tapping
- h #8 Wood Screw
- i #12-14 Self-Tapping
- J #10-16 Self-Tapping



DOT® Grommets and Washers

Sheet Metal Grommets may be used interchangeably with Plain or Tooth Washers. **Plain Washers** are used as basic reinforcement to provide support for the grommet setting. **Tooth Washers** provide a firmer, tighter grip, particularly when used on woven material. **Rolled Rim Grommets** and **Spur Washers** are known for robust construction with a unique design of interlocking teeth that provides premium security for the most rigorous applications.


Sheet Metal Grommet		Plain Washer			
SHEET METAL GROMMETS NASM20230, Type I					
SIZE	PART NO.	ID	OD	LUF	HOLE SIZE
#00	20-10900	.176	.425	.135	3/16
#0	20-00900	.240	.545	.175	1/4
#1	20-00901	.286	.687	.185	9/32
#2	20-00902	.362	.815	.215	3/8
#3	20-00903	.433	.970	.295	7/16
#4	20-00904	.486	1.050	.374	1/2
#5	20-00905	.594	1.220	.330	5/8
ASSEMBLED WITH PLAIN WASHERS					
SIZE	PART NO.	ID	OD		
#00	20-10800	.218	.460		
#0	20-00800	.285	.546		
#1	20-00801	.359	.700		
#2	20-00802	.453	.835		
#3	20-00803	.530	.955		
#4	20-00804	.585	1.064		
#5	20-00805	.740	1.205		

Rolled Rim Grommet		Spur Washer			
ROLLED RIM GROMMETS NASM20230, TYPE III					
SIZE	PART NO.	ID	OD	LUF	HOLE SIZE
#0	20-00990	.270	.670	.175	9/32
#1	20-00991	.380	.790	.210	3/8
#2	20-00992	.425	.890	.245	7/16
#3	20-00993	.430	.970	.255	15/32
#4	20-00994	.560	1.120	.325	9/16
ASSEMBLED WITH SPUR WASHERS					
SIZE	PART NO.	ID	OD		
#0	20-00880	.340	.645		
#1	20-00881	.455	.790		
#2	20-00882	.512	.890		
#3	20-00883	.537	.970		
#4	20-00884	.645	1.120		

Sheet Metal Grommet		Tooth Washer			
SHEET METAL GROMMETS NASM16491/1, TYPE II					
SIZE	PART NO.	ID	OD	LUF	HOLE SIZE
#2	20-00902	.362	.815	.215	3/8
#3	20-00903	.433	.970	.295	7/16
#4	20-00904	.486	1.050	.374	1/2
ASSEMBLED WITH TOOTH WASHERS					
SIZE	PART NO.	ID	OD		
#2	20-008T2	.468	.840		
#3	20-008T3	.545	.945		
#4	20-008T4	.604	1.050		

Eyelet ABE131		Eyelet BBE114		Washer BBW101	
EYELETS AND WASHERS NASM20652/1					
SIZE	PART NO.	ID	OD	LUF	
ABE131	26-10501	.303	.592	.187	
BBE114	47-36685	.176	.403	.143	
BBW101	47-36689	.220	.450		

Eyelet BBT307		Washer BBT308			
EYELETS AND WASHERS					
SIZE	PART NO.	ID	OD	LUF	
BBT307*	47-36619	.174	.403	.210	
BBT308*	47-36620	.220	.425	.125	



PRESSES AND TOOLS



SEMI-AUTOMATIC FOOT PRESS Model 89-M200

- Safety rings
- Adjustable setting pressure
- Compensator unit
- Target light
- Adjustable Table Height 28–32"
- Throat Depth 4.5"
- Weight 200 lbs.



BENCH MOUNT PRESS Model 89-M380E

- Cast iron and steel construction
- Interchangeable with all hand and foot machine dies
- Easy mounting to table or bench
- Throat Depth 4.5"
- Weight 21 lbs.



Snapmaster™ Model 89-M840

- Aluminum and steel construction
- Heavy-duty toggle link mechanism
- Dual bushing system
- Adjustable lower die
- Punches and dies interchangeable in upper or lower die seats
- Cushioned operating lever
- Height 8.75", Width 5", Depth 1"
- Weight 2 lbs.



HAND TOOLS



Lift-the-DOT® Cutting Punch
Part No. 89-9951E



Durable™ Economy Setting Kit
Part No. 89-UCS1T

SETTING TOOLS

Part No.	89-M200		Part No.	89-M200	
	89-M380E	89-M840		89-M380E	89-M840
Durable™	Machine Tools	Machine Tools	Common Sense®	Machine Tools	Machine Tools
93-10112	89-1401		91-78317	89-9577	
93-10127	89-1401	89-4403	91-78318	89-9577	
93-10128	89-1401	89-4403	91-78332	89-9577	
93-10150	89-1403		91-78333	89-9577	
93-10224	89-1410	89-4303	91-78403	89-8199	89-4302
93-10342	89-9557		91-78404	89-8199	
93-10370	89-1412	89-4304	91-78502	89-9578	
93-10379	89-8101	89-4304	91-78505	89-8200	89-4402
93-10412	89-1407	89-4404	91-78507	89-8203	
93-10413	89-1407	89-4404	Sigma™		
93-10414	89-1407	89-4404	95-21154	89-9182	
Baby Durable™			95-22201	89-1580	
94-12105	89-1482		95-22321	89-9219R	
94-12108	89-1483	89-4406	95-22401	89-1587	
94-12126	89-1483	89-4406	95-22402	89-1587	
94-12205	89-9323	89-4307	Speed Rivets®		
94-12206	89-9323	89-4307	95-99884	89-9493	
94-12302	89-9772		95-21409	89-9110	
94-12303	89-9772	89-4308	95-99972	89-9570	
94-12402	89-1488	89-4407	95-22405	89-9114	
94-12404	89-1488	89-4407	Lift-the-DOT®		
94-12405	89-1488		90-16205	89-1454	89-4301
94-12407	89-1488		90-16206	89-1454	89-4301
Pull-the-DOT®			90-16506	89-1455	89-4401
92-18100	89-9758	89-4405	90-16349	89-8043	
92-18103	89-9758	89-4405	90-16358	89-1456	
92-18201	89-8059	89-4305	90-16501	89-8042	
92-18303	89-9760	89-4304	90-16509	89-1457	

CUTTING TOOLS

Lift-the-DOT®

90-16205	89-9433	89-4101
90-16206	89-9433	89-4101
90-16506	89-9432	89-4201

Common Sense®

91-78403	89-4103/89-4203
91-78404	89-4103/89-4203

HAND TOOLS

89-UCS1T	Durable Economy Setting Kit
89-164	Durable Premium Setting Punch for standard Durable caps and eyelets
89-9936	Heavy-duty two-sided Bench Die for Durable caps and eyelets
89-171	Cutting Punch for 16349 stud and 78332/78333 Common Sense turn buttons
89-9951E	Cutting Punch for 16205 and 16206 Lift-the-DOT sockets
89-169B	Screw Driver for Lift-the-DOT screw studs
89-169N	Screw Driver for Durable screw studs
89-9908	Screw Driver for Common Sense turn button with screws
89-9940	Bench Die for 16358 Lift-the-DOT stud
89-192	Chuck Holder for .375" shank punches and dies
89-9902	Bench Die Holder for .375" shank punches and dies

Pre-Punch Hole Piercing Dies

89-9061	Top Punch for .187" hole for Durable
89-9974	Bottom Die for .187" hole for Durable
89-9135	Top Punch for .128" hole for Baby Durable
89-9975	Bottom Die for .128" hole for Baby Durable

PRESSES AND TOOLS – Grommets and Washers



SEMI-AUTOMATIC FOOT PRESS Model 89-M200

- Safety rings
- Adjustable setting pressure
- Compensator unit
- Target light
- Adjustable Table Height 28–32"
- Throat Depth 4.5"
- Weight 200 lbs.



HAND TOOLS


Common Sense®
Cutting Punch
Part No. 89-450E



SETTING TOOLS - GROMMETS AND WASHERS

Size	Part No.	Hand Tools	89-M200 Machine Tools with 3/8" Shank Size
SHEET METAL			
#00	20-10900	22-RHT00GR	22-R16P00GR, 22-R116Y00GR
#0	20-00900	22-RHT0GR	22-R16P0GR, 22-R116Y0GR
#1	20-00901	22-RHT1GR	22-R16P1GR, 22-R116Y1GR
#2	20-00902	22-RHT2GR	22-R16P2GR, 22-R116Y2GR
#3	20-00903	22-RHT3GR	22-R16P3GR, 22-R116Y3GR
#4	20-00904	22-RHT4GR	22-R16P4GR, 22-R116Y4GR
ROLLED RIM			
#0	20-00990	22-RHT0RR	22-R16P0RR, 22-R116Y0RR
#1	20-00991	22-RHT1RR	22-R16P1RR, 22-R116Y1RR
#2	20-00992	22-RHT2RR	22-R16P2RR, 22-R116Y2RR
#3	20-00993	22-RHT3RR	22-R16P3RR, 22-R116Y3RR
#4	20-00994	22-RHT4RR	22-R16P4RR, 22-R116Y4RR
EYELETS			
ABE131	26-10501		22-R16M1KLON, 22-R116Y1KLON
BBE114	47-36685		22-R16P36685
BBW101	47-36689		22-116YS6619

AUTOMATIC ATTACHING EQUIPMENT

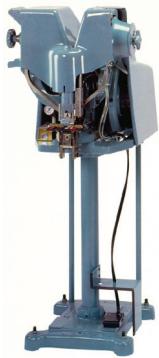

SNAP FASTENERS AUTOMATIC ATTACHING MACHINE Model 7057

FEATURES

- Full safety guards
- Optional target light
- Manual adjustable stand available
- Throat Depth 4.25"
- Floor Space 4.1 sq. ft.
- Weight 400 lbs.

BENEFITS

- Fully automatic feeding
- High speed attachments
- Rugged and proven design
- Quiet operation
- Operator friendly




GROMMETS AND WASHERS ATTACHING MACHINE Segal Pneumatic Grommet Machine – Model 4KGW

FEATURES

- PLC controls for all functions
- Simplified machine recovery operation
- For use with Plain or Rolled Rim Grommets #0 to #4, and Neck, Tooth and Spur Washers
- Available with mobile base
- Requires 90–100psi compressed air supply
- Weight 380 lbs.

BENEFITS

- Fully automatic feeding and hole punching for both grommet and washer
- Need to set timing eliminated by PLC controls
- PLC controls clean jams and shuttle washers
- Reduced number of parts as compared to mechanical machines

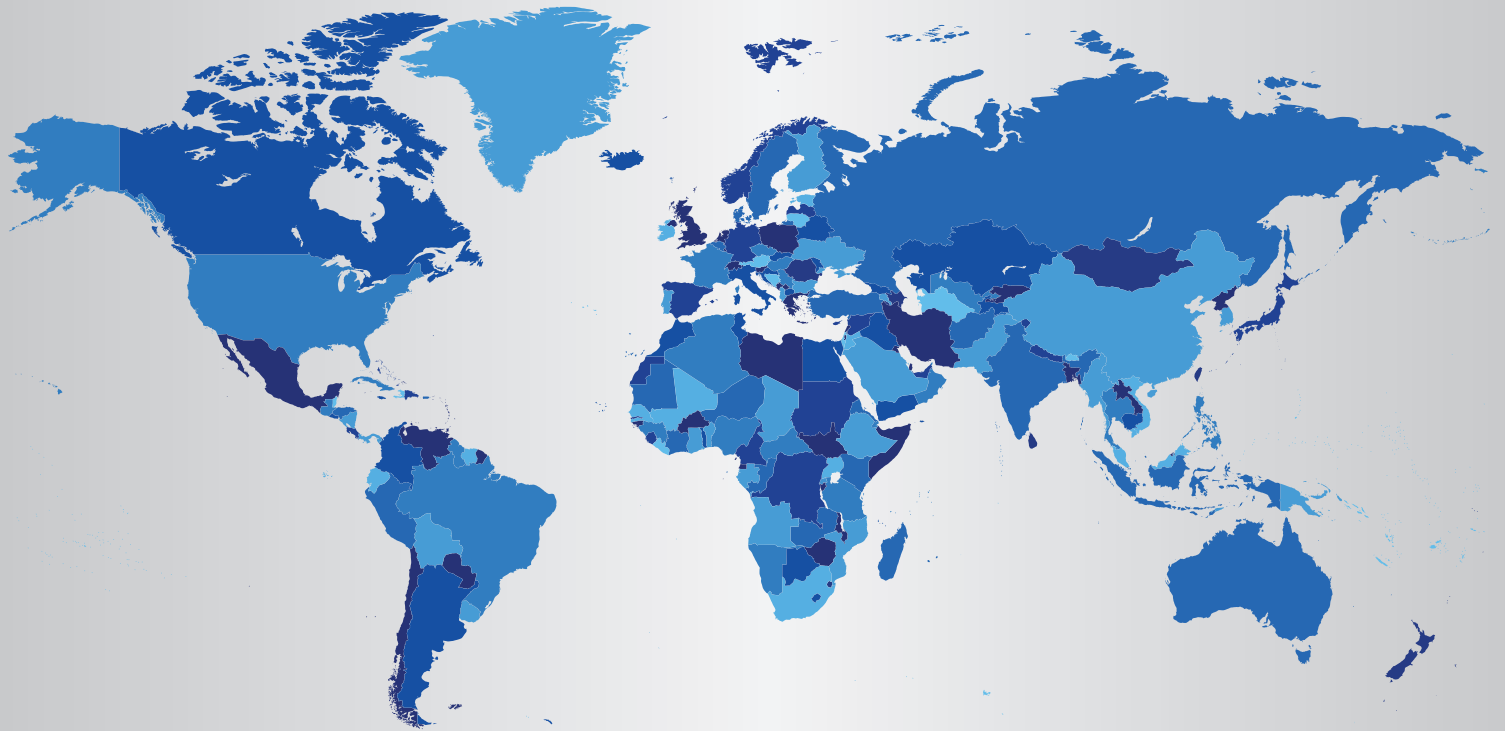

SCOVILL

Great Designs Deserve Great Fasteners.

Scovill Fasteners develops and manufactures a diverse range of high-performance fasteners for our apparel and industrial partners. Our customer-focused capabilities and global collaboration provide the highest level of service – from fastener design and delivery to application.

AMERICAS – Global Headquarters

Scovill Fasteners
1802 Scovill Drive
Clarkesville, Georgia 30523
USA
Toll Free: 1-888-726-8455 (1-888-SCOVILL)
Phone: 706-754-1000
Fax: 706-754-4000

EUROPE

Scovill Fasteners UK Limited
The Old Courtyard, 11 Lower Cookham Road
MAIDENHEAD SL6 8JN
United Kingdom
DOT Customer Service Phone: +44(0) 7834-844001
DOT Sales Phone: +44(0) 1484-720187
Apparel Phone: 706-754-1000 or 1-888-726-8455

ASIA-PACIFIC

Morito Scovill Hong Kong Company Limited
3/F, China Aerospace Centre
No. 143 Hoi Bun Road
Kwun Tong, Kowloon
Hong Kong
Phone: +852 (3658) 7700
Fax: +852 (2428) 8121

INDIA REGIONAL

Scovill Fasteners India Private Limited
Door No: 47, 4th Street
Swarnapuri Avenue
15 Velampalayam
Tirupur, India – 641652
Phone: (91) 421-6457 910
Fax: (91) 421-2256 930

Visit us at scovill.com

